

CERTIFICATE OF COMPLIANCE NZTA T 12:2012

Applicator: 2022 Graco Line Lazer 200MMA 1:1 Type LC Long Life Applicator

Owner: Fulton Hogan Ltd,
Dunedin
11 Main Rd, Fairfield
Dunedin
9018



Test Description: The pavement marking applicator as described by this certificate has been tested under the conditions described and found to comply with the relevant requirements of TNZ Specification TNZ T/12:2012 and Fulton Hogan Ltd Technical Specifications.

Test Conditions: The scope of the Certification was as follows:

- 1) Application of Spray Plastic to Schedule A Plain Flat Markings,

Test Identification: Initial tests were carried out at the Forsyth Stadium, Dunedin on the 8th May 2025. Further testing was undertaken on the 4th of June 2025.

The Applicator Chassis Number is: G21B17Y513000181

The material used for the tests was:

Damar CAP Spray Parts A & B and Potters Pristine AC-07 Drop-on Glass Beads (AS/NZS 2009).

Equipment Tested:

2 x paint pumps	Graco	496214 A & B
2 component paint gun	Graco	N/A
Bead Gun	Graco	N/A
Compressor	FARC – S15	496214
Speedometer	Red Lion	298.02

Applicator Speeds (kph):

Schedule	Line Width		
	100mm	150mm	200mm
A	1.97	1.23	1.4

CERTIFICATE OF COMPLIANCE NZTA T 12:2012

Schedule A

Flat Spray Cold Applied Plastic in accordance with Fulton Hogan, Dunedin Technical Specification, NZTA P30:2008 and NZTA T12:2013

The markings when applied to flat electro-galvanised steel plates met all dimension and performance requirements as specified in NZTA P30:2009 Specification for High Performance Roadmaking's and NZTA T12:2013 Specification for Long-Life Pavement Marking Material Applicator Testing.

The values specified in Fulton Hogan Dunedin's Technical Specs, NZTA P30:2009 and NZTA T12:2013 used for determination of compliance were as follows:

Line width.

All line widths; + 10 %, - 5 % of the specified value. (150 mm)

Flat Spray Cold Applied Plastic.

Dry film thickness (DFT) of 625 $\mu\text{m} \pm 20\%$.

Retroreflectivity.

AS/NZS 2009 Class B (drop-on) glass beads applied uniformly at a minimum rate of 275gm/m².

Dry retroreflectivity; a minimum of 150 mcd/m²/lux.

Wet retroreflectivity; a minimum of 80 mcd/m²/lux

Day Time Visibility.


Minimum Qd of 100 mcd/m²/lux

Colour.

Yellow; a discolouration of not more than 4/5 from colour Y35 of AS2007S

Skid Resistance.

45 BPN or greater for roadmaking's with a dry film thickness of less 0.9 mm.

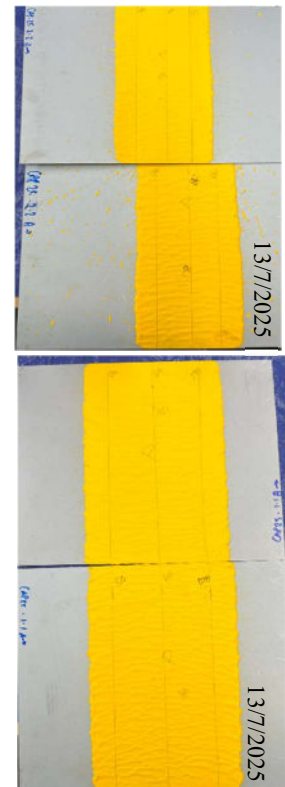

CERTIFICATE OF COMPLIANCE NZTA T 12:2012

Registration Details: [NZRF Stamp & Unique Number}

6098



INITIAL Certificate Issuing Officer: Bruce Belton
Mark Roads Ltd

Testing Officer: Tony McLellan
Fulton Hogan Ltd

Signed:

Handwritten signature of Tony McLellan in black ink.

Date of Expiry: 4 June 2026

